

**Gamma In**  
COMMERCIAL PROFILES



**Electrical characteristics**

Light intensity: > 95%  
Lifespan (L80): 50,000 h (Tp: 60°)  
Angle: 120°; 80°  
Photobiological Risk Group RG0 ("Exempt") (EN 62471:2006)

**Mechanical characteristics**

Body in die-cast aluminium (painted)  
Polycarbonate lens - International Protection Class IP40.  
Shock Protection IK06 (EN60529)

**Electrical characteristics**

AC input: 110/240V - 50/60Hz  
Power factor: >0.90

**Lamp characteristics**

SMD LED chip. CRI Ra>80


**Accessories**

Dimming 0-10V/DALI (sub-code D)

**Regulations**

Produced in accordance with EN standards EN55015:2013, EN61547:2009, EN61000-3-2:2006+A1:2009+A2:2009, EN61000-3-3:2013, EN61000-4-2:2009, EN61000-4-3:2006+A2:2010, EN61000-4-4:2004+A1:2010, EN61000-4-5:2006, EN61000-4-6:2009, EN61000-4-8:2010, EN61000-4-11:2004, EN 60598-1:2008+A11:2009, EN 62471:2008, EN 62031:2008, IEC62321:2013, EN60529:1992, EN 62262:2002, EN 12464-1

	30W 600 120°	30W 600 80°	30W 900 120°	30W 900 80°	40W 1200 120°	40W 1200 80°	60W 1500 120°	60W 1500 80°
<b>L [mm]</b>	620	620	915	915	1207	1207	1507	1507
<b>P [mm]</b>	70	130	70	130	130	130	130	130
<b>H [mm]</b>	37	75	37	75	45	75	45	75
<b>C1 [mm]</b>	610	610	905	905	1197	1197	1497	1497
<b>C2 [mm]</b>	60	110	60	110	110	110	110	110

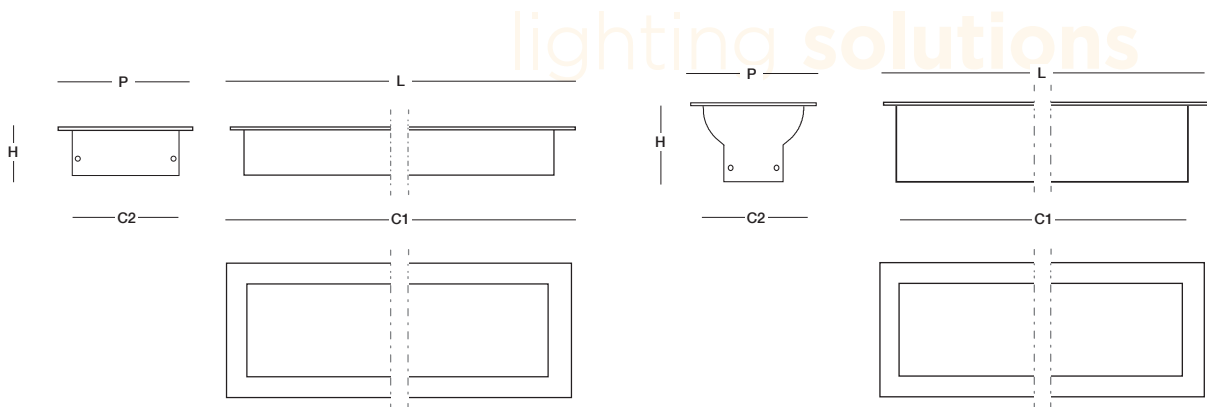

The data have a tolerance level of +/-10% and are subject to modification without prior notice.  
The pictures and dimensional parameters are merely an indication, and may differ from the end product.





**Gamma In**  
COMMERCIAL PROFILES



CODE	POWER [W]	COLOUR [K]	ANGLE [°]	EFFICIENCY [lm/W]
GI30102781206	30	2700	120	100
GI30104081206	30	4000	120	100
GI30102780806	30	2700	80	100
GI30104080806	30	4000	80	100
GI30102781209	30	2700	120	100
GI30104081209	30	4000	120	100
GI30102780809	30	2700	80	100
GI30104080809	30	4000	80	100
GI40102781212	40	2700	120	100
GI40104081212	40	4000	120	100
GI40102780812	40	2700	80	100
GI40104080812	40	4000	80	100
GI60102781215	60	2700	120	100
GI60104081215	60	4000	120	100
GI60102780815	60	2700	80	100
GI60104080815	60	4000	80	100

lighting solutions

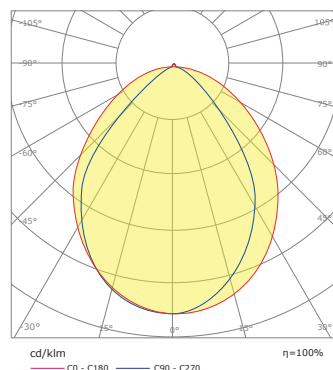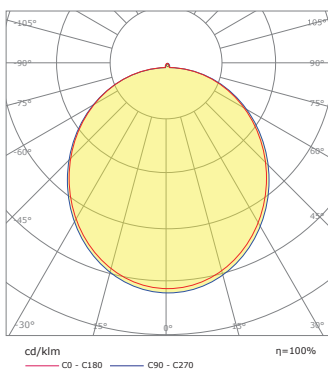

The data have a tolerance level of +/-10% and are subject to modification without prior notice.  
The pictures and dimensional parameters are merely an indication, and may differ from the end product.

