

Kineos

BINARY SPOTLIGHTS



Lighting characteristics

Light intensity: > 95%

Lifespan (L80): 50,000 h (Tp: 60°)

Adjustable angle for KS060710800 and KS100710800 models; 45° for the others

Photobiological Risk Group RG0 ("Exempt") (EN 62471:2006)

Mechanical characteristics

Body in die-cast aluminium (painted)

Polycarbonate lens

International Protection Class IP20

Electrical characteristics

AC input: 85/265V - 50/60Hz. Power factor: >0.90

Lamp characteristics

COB LED chip

CRI Ra>80


Accessories

Dimming 0-10V/DALI (sub-code D)


Regulations

Produced in accordance with EN standards EN55015:2013, EN61547:2009, EN61000-3-2:2006+A1:2009+A2:2009, EN61000-3-3:2013, EN61000-4-2:2009, EN61000-4-3:2006+A2:2010, EN61000-4-4:2004+A1:2010, EN61000-4-5:2006, EN61000-4-6:2009, EN61000-4-8:2010, EN61000-4-11:2004, EN 60598-1:2008+A11:2009, EN 62471:2008, EN 62031:2008, IEC62321:2013, EN60529:1992, EN 62262:2002, EN 12464-1

	18W	35W	45W
L [mm]	97	97	210
D [mm]	75	75	167
H [mm]	126	126	126

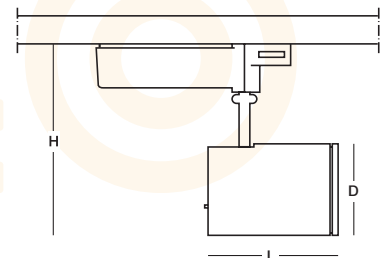

CODE	POWER [W]	COLOUR [K]	EFFICIENCY [lm/W]
KI180827860	18	2700	80
KI180840860	18	4000	80
KI350827860	35	2700	80
KI350840860	35	4000	80
KI450827860	45	2700	80
KI450840860	45	4000	80

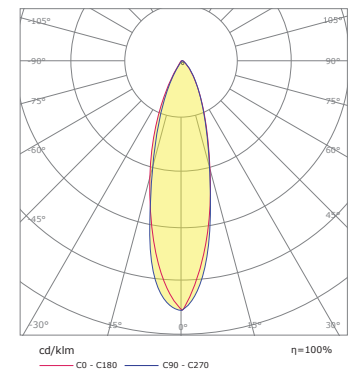

The data have a tolerance level of +/-10% and are subject to modification without prior notice.
The pictures and dimensional parameters are merely an indication, and may differ from the end product.