

## Kodos Plus Stretto

INDUSTRIAL LED HIGH BAYS



### Lighting characteristics

Light intensity: > 95%  
Lifespan (L80): 50,000 h (Tp: 60°)  
Photobiological Risk Group RG0 ("Exempt") (EN 62471:2006)

### Mechanical characteristics

Body in die-cast aluminium  
Tempered glass shield  
International Protection Class IP65  
Shock Protection IK08 (EN60529)

### Electrical characteristics

AC input: 85/265V - 50/60Hz  
Power factor: >90

### Lamp characteristics

SMD LED chip

CRI Ra>80


### Accessories

Dimming 0-10V/DALI (sub-code D)  
There is a shield complying with the HACCP regulation for food processing and transformation environments  
A reinforced shield is also available

### Regulations


Produced in accordance with EN standards EN55015:2013, EN61547:2009, EN61000-3-2:2006+A1:2009+A2:2009, EN61000-3-3:2013, EN61000-4-2:2009, EN61000-4-3:2006+A2:2010, EN61000-4-4:2004+A1:2010, EN61000-4-5:2006, EN61000-4-6:2009, EN61000-4-8:2010, EN61000-4-11:2004, EN 60598-1:2008+A11:2009, EN 62471:2008, EN 62031:2008, IEC62321:2013, EN60529:1992, EN 62262:2002, EN 12464-1.

|        | 100W | 150W | 200W |
|--------|------|------|------|
| H [mm] | 549  | 459  | 467  |
| L [mm] | 246  | 303  | 246  |
| D [mm] | 367  | 367  | 367  |

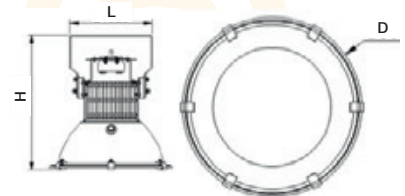

| CODE        | POWER [W] | COLOUR [K] | EFFICIENCY [lm/W] |
|-------------|-----------|------------|-------------------|
| KP101245804 | 100       | 4500       | 120               |
| KP101255804 | 100       | 5500       | 120               |
| KP151245804 | 150       | 4500       | 120               |
| KP151255804 | 150       | 5500       | 120               |
| KP201245804 | 200       | 4500       | 120               |
| KP201255804 | 200       | 5500       | 120               |

lighting solutions

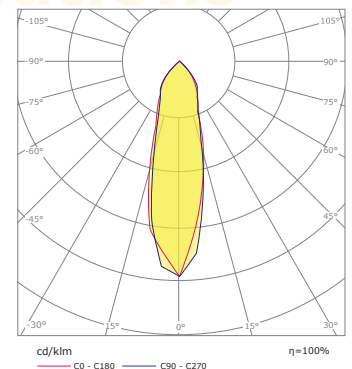

The data have a tolerance level of +/-10% and are subject to modification without prior notice.  
The pictures and dimensional parameters are merely an indication, and may differ from the end product.

