

Nefos 1500

WATERTIGHT LED ELEMENTS



Lighting characteristics

Light intensity: > 95%

Lifespan (L80): 50,000 h (Tp: 60°)

Photobiological Risk Group RG0 ("Exempt") (EN 62471:2006)

Mechanical characteristics

Body in self-extinguishing polycarbonate V2.
Colour: RAL7035

Diffuser in self-extinguishing polycarbonate V2 (photo-engraved)

International Protection Class IP65

Shock Protection IK08 (EN60529)

Electrical characteristics

AC input: 100/240V - 50/60Hz

Power factor: >0.95

Lamp characteristics

SMD LED chip - CRI Ra>82

Accessories

Dimming 0-10V/DALI (sub-code D)


Metal closure clips (sub-code S)

50% light in emergency, duration 1.5h (sub-code E).
Other parameters are available upon request.


Regulations

Produced in accordance with standards EN55015:2013, EN61547:2009, EN61000-3-2:2006+A1:2009+A2:2009, EN61000-3-3:2013, EN61000-4-2:2009, EN61000-4-3:2006+A2:2010, EN61000-4-4:2004+A1:2010, EN61000-4-5:2006, EN61000-4-6:2009, EN61000-4-8:2010, EN61000-4-11:2004, EN 60598-1:2008+A11:2009, EN 62471:2008, EN 62031:2008, IEC62321:2013, EN60529:1992, EN 62262:2002, EN 12464-1

	25W	50W
H [mm]	69	69
L1 [mm]	75	115
L2 [mm]	1588	1588

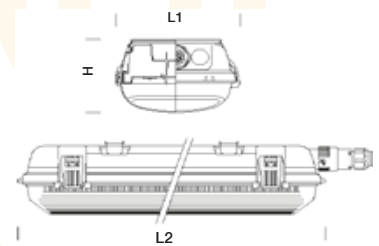

CODE	POWER [W]	COLOUR [K]	EFFICIENCY [lm/W]
NF060112288	25	2800	125
NF060112458	25	4000	125
NF060112558	25	5700	125
NF060212288	50	2800	125
NF060212458	50	4000	125
NF060212558	50	5700	125

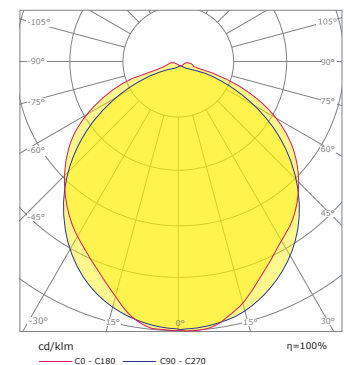

The data have a tolerance level of +/-10% and are subject to modification without prior notice.
The pictures and dimensional parameters are merely an indication, and may differ from the end product.

