

## Nefos 600

WATERTIGHT LED ELEMENTS



### Lighting characteristics

Light intensity: > 95%

Lifespan (L80): 50,000 h (Tp: 60°)

Photobiological Risk Group RG0 ("Exempt") (EN 62471:2006)

### Mechanical characteristics

Body in self-extinguishing polycarbonate V2.

Colour: RAL7035

Diffuser in self-extinguishing polycarbonate V2 (photo-engraved)

International Protection Class IP65

Shock Protection IK08 (EN60529)

### Electrical characteristics

AC input: 100/240V - 50/60Hz

Power factor: >0.95

### Lamp characteristics

SMD LED chip - CRI Ra>82

### Accessories

Dimming 0-10V/DALI (sub-code D)

Metal closure clips (sub-code S)


50% light in emergency, duration 1.5h (sub-code E).

Other parameters are available upon request.

### Regulations


Produced in accordance with standards EN55015:2013, EN61547:2009, EN61000-3-2:2006+A1:2009+A2:2009, EN61000-3-3:2013, EN61000-4-2:2009, EN61000-4-3:2006+A2:2010, EN61000-4-4:2004+A1:2010, EN61000-4-5:2006, EN61000-4-6:2009, EN61000-4-8:2010, EN61000-4-11:2004, EN 60598-1:2008+A11:2009, EN 62471:2008, EN 62031:2008, IEC62321:2013, EN60529:1992, EN 62262:2002, EN 12464-1

	9W	18W
<b>H [mm]</b>	69	69
<b>L1 [mm]</b>	75	115
<b>L2 [mm]</b>	680	680

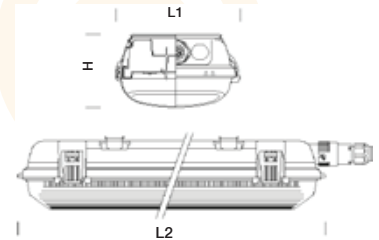

lighting solutions

CODE	POWER [W]	COLOUR [K]	EFFICIENCY [lm/W]
NF060112288	9	2800	125
NF060112458	9	4000	125
NF060112558	9	5700	125
NF060212288	18	2800	125
NF060212458	18	4000	125
NF060212558	18	5700	125

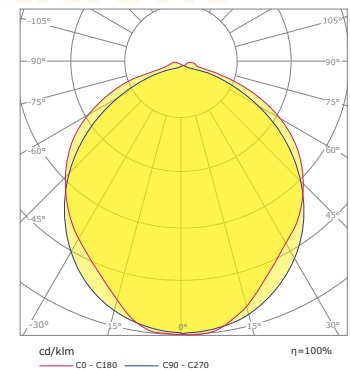

The data have a tolerance level of +/-10% and are subject to modification without prior notice. The pictures and dimensional parameters are merely an indication, and may differ from the end product.

