



Omnia Mall Largo

FLUSH-MOUNTING LED SPOTLIGHTS

Lighting characteristics

Light intensity: > 85%
Lifespan (L80): 50,000 h (Tp: 60°)
Photobiological Risk Group RG0 ("Exempt") (EN 62471:2006)

Mechanical characteristics

Body in die-cast aluminium
Polycarbonate shield
International Protection Class IP54 (visible part), IP20 (hidden part)
Shock Protection IK08 (EN60529)

Electrical characteristics

AC input: 85/265V - 50/60Hz
Power factor: >0.90

Lamp characteristics

COB LED chip
CRI Ra>80


Accessories

Dimming 0-10V/DALI (sub-code D)
Special applications for the food industry available upon request: Butcher's (sub-code M), Baker's (sub-code B), Greengrocer's (sub-code V), Fishmonger's (sub-code F)

Regulations


Produced in accordance with standards EN55015:2013, EN61547:2009, EN61000-3-2:2006+A1:2009+A2:2009, EN61000-3-3:2013, EN61000-4-2:2009, EN61000-4-3:2006+A2:2010, EN61000-4-4:2004+A1:2010, EN61000-4-5:2006, EN61000-4-6:2009, EN61000-4-8:2010, EN61000-4-11:2004, EN 60598-1:2008+A11:2009, EN 62471:2008, EN 62031:2008, IEC62321:2013, EN60529:1992, EN 62262:2002, EN 12464-1

	38W	50W
C [mm]	205	205
H [mm]	99	99
D [mm]	230	230



lighting solutions

CODE	POWER [W]	COLOUR [K]	EFFICIENCY [lm/W]
OM2038112710	38	2700	110
OM2038114510	38	4500	110
OM2038115510	38	5500	110
OM2050112710	50	2700	110
OM2050114510	50	4500	110
OM2050115510	50	5500	110

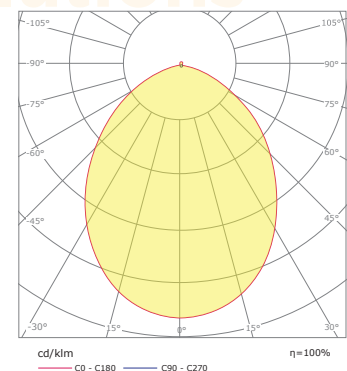

The data have a tolerance level of +/-10% and are subject to modification without prior notice.
The pictures and dimensional parameters are merely an indication, and may differ from the end product.

