

Omnia Periscope

FLUSH-MOUNTING ADJUSTABLE LED SPOTLIGHTS



Lighting characteristics

Light intensity: > 85%

Lifespan (L80): 50,000 h (Tp: 60°)

Photobiological Risk Group RG0 ("Exempt") (EN 62471:2006)

Mechanical characteristics

Body in die-cast aluminium

Polycarbonate shield

International Protection Class IP20

Shock Protection IK08 (EN60529)

Electrical characteristics

AC input: 220/240V - 50/60Hz

Power factor: >0.90

Lamp characteristics

SMD LED chip

CRI Ra>80


Accessories

Dimming 0-10V/DALI (sub-code D)


Regulations

Produced in accordance with EN standards EN55015:2013, EN61547:2009, EN61000-3-2:2006+A1:2009+A2:2009, EN61000-3-3:2013, EN61000-4-2:2009, EN61000-4-3:2006+A2:2010, EN61000-4-4:2004+A1:2010, EN61000-4-5:2006, EN61000-4-6:2009, EN61000-4-8:2010, EN61000-4-11:2004, EN 60598-1:2008+A11:2009, EN 62471:2008, EN 62031:2008, IEC62321:2013, EN60529:1992, EN 62262:2002, EN 12464-1

	12W	20W	30W
C [mm]	95	125	145
H [mm]	74	95	116
D [mm]	102	132	162

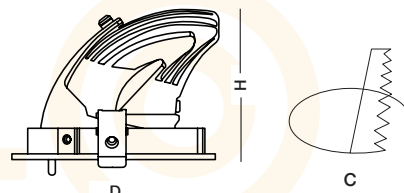

CODE	POWER [W]	COLOUR [K]	EFFICIENCY [lm/W]
OP091207278	12	2700	70
OP091207458	12	4500	70
OP091207558	12	5500	70
OP122007278	20	2700	70
OP122007458	20	4500	70
OP122007558	20	5500	70
OP153007278	30	2700	70
OP153007458	30	4500	70
OP153007558	30	5500	70

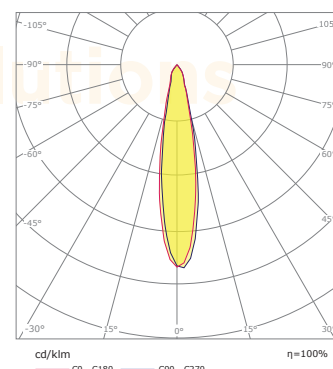

The data have a tolerance level of +/-10% and are subject to modification without prior notice.
The pictures and dimensional parameters are merely an indication, and may differ from the end product.

